

## CHARACTERISTICS

### Physical-chemical

- Continuous working temperatures: - 30°C to + 280°C  
Peaks at + 320°C.
- Good resistance to thermal shocks and UV.
- Good mechanical and abrasion strength.
- Self-extinguishing.

### Electrical

- Dielectric strength: 0.8 to 1.2 kV.

## PRODUCTS

- Standard colour: black or white.

## PACKAGING

- Diameter 0.5 to 12 mm: 100 m rolls.
- Diameter 14 to 20 mm: 50 m rolls.
- Diameter 25 to 50 mm: rolls of 25 m maximum.

## OPTIONS


- Other diameters: consult us.
- Sleeving supplied in cut lengths: consult us.

Braided sleeving of special solvent-free varnish-impregnated fibreglass.

## STANDARDS\* - APPROVALS


- UL 1441 / CSA C22.2 N°198.3 - VW1 approved  
File number : E212701

- NF C 93-641.

- IEC 684-1, EN 60684-1 and IEC 684-2. 

## APPLICATIONS

- Wiring of heating elements.
- Electrical household appliances.
- Cooking appliances, furnaces, ovens, dryers, convectors.
- Lighting.
- Sleeving for cable bundles subjected to high temperatures and mechanical stresses.

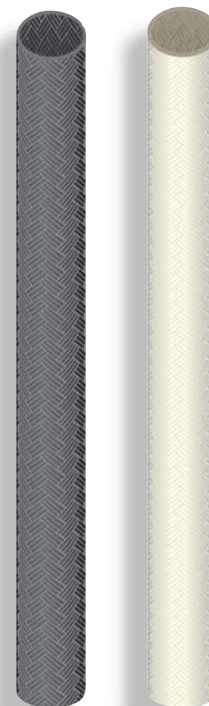

## INNER DIAMETER

Nominal value mm	Tolerance mm
0.5	± 0.20
0.8	± 0.20
1	± 0.25
1.5	± 0.25
2	± 0.25
2.5	± 0.25
3	± 0.25
3.5	± 0.30
4	± 0.30
4.5	± 0.30
5	± 0.30
6	± 0.30
7	± 0.40
8	± 0.40
9	± 0.50
10	± 0.50
12	± 1.00
14	± 1.00
16	± 1.00
18	± 1.00
20	± 1.00
25	± 2.00
30	± 2.00
35	± 2.00
40	± 3.00
45	± 3.00
50	± 4.00

Nominal wall thickness mm	Approx. linear weight kg/km
0.35	2.50
0.35	2.80
0.35	2.90
0.35	3.30
0.40	4.50
0.40	5.50
0.40	6.50
0.45	7.80
0.45	8.80
0.45	10.0
0.45	11.0
0.45	11.5
0.45	12.5
0.45	13.2
0.45	14.4
0.45	15.0
0.45	19.4
0.45	23.5
0.50	33.0
0.50	45.0
0.60	47.0
1.20	89.0
1.20	101
1.30	129
1.40	165
1.50	205
1.50	250

\* Standards: our products meet all or part of the requirements of the above-mentioned standards - consult us.

"Angivna värden är baserade på tillverkarens egna uppgifter och lämnas utan förbindelse."